




Washing Machine - first-class hygiene

- Double-walled stainless steel construction
- Wash and rinse-wash-rotary arm made of stainless steel
- Wash tray serial
- Filter at the main pump
- Easy to handle tray's
- Temperature and error values shown on the display
- Self cleaning function for the inside space
- The water hardness should be between 30 and 90 mg CaCO₃/l, if it is harder a water softening treatment is needed.
- Water supply of 55°C is recommended
- WLAN connection for constant checking and optimisation of the operating status as well as error analysis in case of defects, thus short downtimes due to repairs

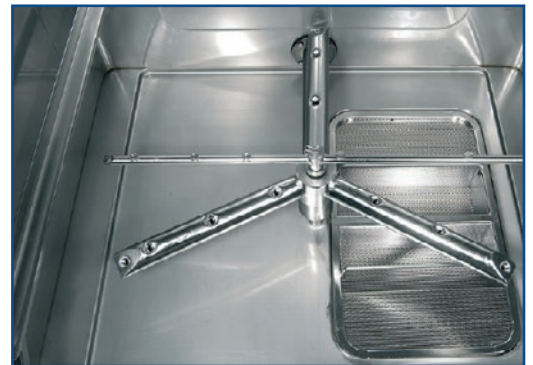

Easy to clean with big filter boxes



No corners, extremely hygienic



CLEANING SYSTEM

WASHING MACHINE



Model	HPW 40BT	HPW 60BT	HPW 80BT	HPW 130BT
Size (W x D x H) mm *height with open door	720 x 858 x 1712 / 2050*	836 x 915 x 1870 / 2170*	996 x 915 x 1870 / 2170*	1506 x 915 x 1870 / 2170*
Wash-space (mm) ** High version	550 x 650 x 670 / 820** h	650 x 700 x 670 / 820** h	810 x 700 x 670 / 820** h	1320 x 700 x 670 / 820** h
Pump	1 500 W	3 000 W	3 000 W	2 x 3 000 W
Chemical dosing pump (time-controlled)	on request	on request	on request	on request
Total connected load	7 500 W	9 000 W	9 000 W	15 000 W
Boiler heating element	6 000 W	6 000 W	6 000 W	9 000 W
Tank heating element	4 000 W	6 000 W	6 000 W	9 000 W
Tank capacity	42 l	82 l	86 l	132 l
Boiler capacity	10,5 l	10,5 l	10,5 l	14,5 l
Water consumption/cycle	4,5 l	4,5 l	5 l	8 l
Weight	200 kg	236 kg	261 kg	340 kg
Item No.	RM.01.008	RM.01.010	RM.01.011	RM.01.012

Additional equipment

- Chemical pump
- Flow-pump
- Clear rinsing dosage