



service-friendly
housing




step-by-step
visualisation of hand
washing via LEDs




especially
corrosion-protected
drive unit



2-hand disinfection with
tamper-proof
nozzle positioning



ergonomic, individually
adjustable reach
positioning

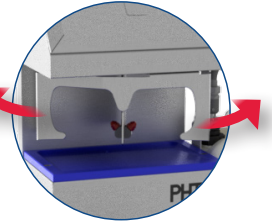

EntryX Plus

Designation: PHT-Entry control EntryX Plus Type 53510
Execution: Water/soap separate, with fan, left-hand version
Item number: HI05-00120-LI03W0

*Images may vary.
Subject to technical changes and errors excepted.*

PHT-Entry control EntryX Plus Duo InnovationX for your hygiene safety...

- forced-guided, combined hand cleaning and disinfection with a gently starting, motor-driven 3-arm turnstile
- spacious hand washing area with sensor-controlled one-handed soap dispenser
- step-by-step visualisation via LEDs
- 2-hand disinfection with tamper-proof nozzle positioning
- transparent, easy-to-clean dispenser area
- ergonomic, individually adjustable reach positioning
- service-friendly housing:
 - fold-out turnstile unit
 - easily accessible control and
 - dosing technology thanks to removable cover
- drive block with special corrosion protection

Equipment features:

- optional left or right version
- optionally with or without hot air hand dryer with F8 filter
- either water and soap separately or as a mixture
- wall-mounted unit with Schuko plug
- generously dimensioned LED – red/green, for visualising access authorisation
- 5L container with LED empty indicator
- fixable collection container for excess disinfectant
- a potential-free contact for connecting a door opener
- 2 inputs, e.g. for magnetic card readers

Technical specifications



Type 53510	Water/soap separate, with fan
Type 53520	Water/soap mixture, with fan
Type 53410	Water/soap separately, without fan
Type 53420	Water/soap mixture, without fan

External dimensions W x D x H (in mm)	1068 x 322 (854) x 890
Weight	approx. 70 kg
Material	stainless steel 1.4301
Network connection	230 V (1/N/PE); 50-60 Hz; 0,3 kW
Protection class	IP 54



Connection diagram | Type 53510 – Water/soap separate, with fan, left-hand version:

Dimensions in mm

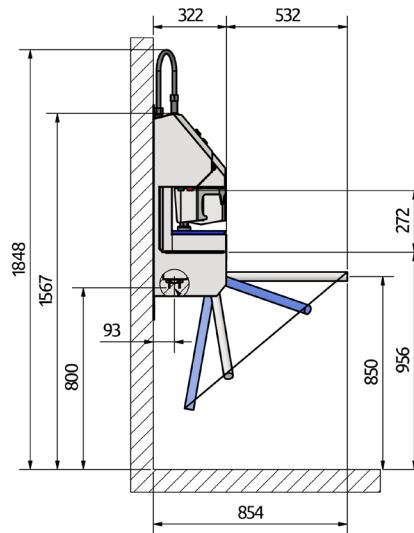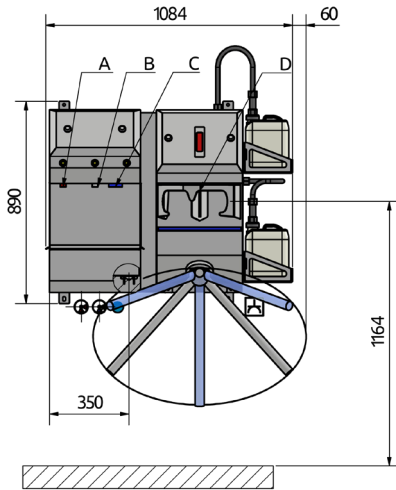


A Soap
B Water
C Air drying
D Disinfection

Options:

- PHT dispenser unit - folded paper type
- Base for floor mounting
- 2-arm design for escape route support
- Suction lance lock
- Integration into PHT sole cleaning devices with time-delayed release for higher hygiene standards

Illustrations - further details:

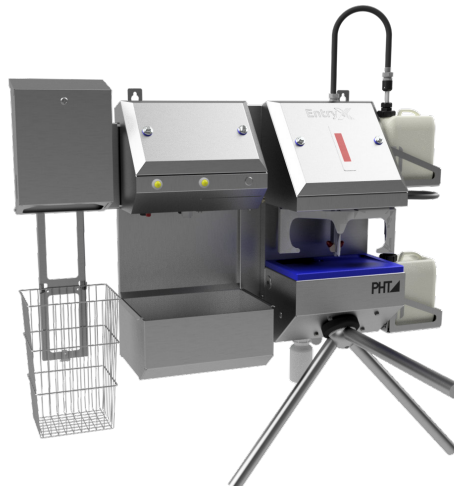

EntryX Plus

Designation: PHT-Entry control EntryX Plus Duo
Type 53710
Execution: Water/soap separate, with fan
Item number: HI05-00220-KR03W0

Designation: PHT-Entry control EntryX Plus
Type 53410 with optional paper dispenser unit
Execution: Water/soap separate, without fan, left-hand version
Item number: HI05-00100-LI03W0
HI02-00022-000010 (Option)

Images may vary.
Subject to technical changes and errors excepted.

Revision status V 1.0 | 07.2025 | AV, MQM